


## FUNCTION

1. This series of pad printers are widely used in the industries of plastic goods, stationary, toys, electrical appliances, ceramic goods, shoes, leathers, papers, wooden goods and cosmetics, etc.
2. This series of pad printers are equipped with advanced microcomputer controls. With multi major function program presenting, the machines are multi functional.
3. Once a functional program is selected, it will be stored in the memory forever. It is not necessary to re-preset the functional programs in the event of power failure, and no back-up batteries are needed.
4. Various pad printing functions can be selected directly by pressing the sensitive feather-touch buttons on the console panel. It is very simple to operate.
5. The up-to-date and durable pneumatic components are manufactured by famous West German and Japanese factories. They all operate smoothly and powerfully.
6. The aluminium alloy machine case is light and durable, its structure is precise and causes higher efficiency.
7. Having a prevalent performance, it is equipped with special vibration absorber, speed - adjustable blades or pressure adjustable inkcup.
8. The precise hard axle reduces the friction caused by the movement of machine when printing and has good rust resistance.
9. It can be used for non-flat surface with a function of pre-stoppable adjustment for pads.

## TIC-301S

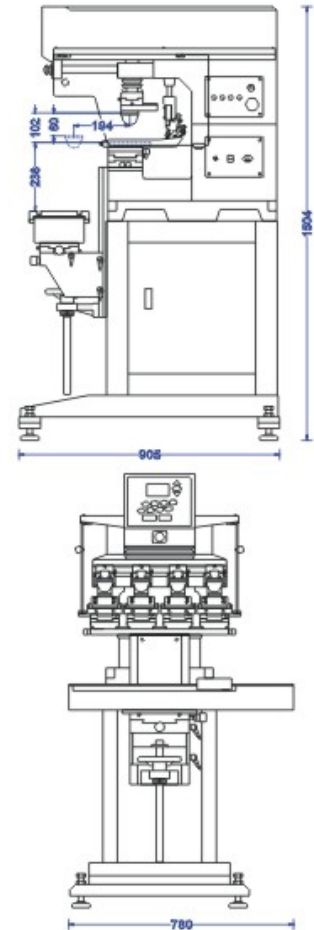

## SPECIFICATIONS

MODEL	型号	TIC-301S	TIC-301SC
Color	印刷颜色	Single to four color 单色至四色, Pitch 127mm 中心距 127mm	
Work table	工作台	Servo-motor shuttle 伺服马达直推式	
Configuration	配置	Open ink system 开放式油盘	Closed ink system 密闭式油盘
Steel plate size	钢板尺寸	100x150mm	80x275mm 100x300*mm
Ink cup size	可装油盅直径		∅ 70 ,82,90*mm
Max. speed	最大印刷速度	500cycle/hr 小时	
Printing force	胶头压力	1640N(168kg)at 6 bar	
Air pressure	气源压力	0.5 MPa (5bar)	
Machine dimension	机身尺寸	905x780x1504mm	
Packing dimension	包装尺寸	1020x900x1660mm	
Weight	机身重量	185kg	
Power	电源	110V or 220V 60/50Hz 350W	

For standard configuration