





FUNCTION

1. This series of pad printers are widely used in the industries of plastic goods, stationary, toys, electrical appliances, ceramic goods, shoes, leathers, papers, wooden goods and cosmetics, etc.
2. This series of pad printers are equipped with advanced microcomputer controls. With multi major function program presenting, the machines are multi functional.
3. Once a functional program is selected, it will be stored in the memory forever. It is not necessary to re-preset the functional programs in the event of power failure, and no back-up batteries are needed.
4. Various pad printing functions can be selected directly by pressing the sensitive feather-touch buttons on the console panel. It is very simple to operate.
5. The up-to-date and durable pneumatic components are manufactured by famous West German and Japanese factories. They all operate smoothly and powerfully.
6. The aluminium alloy machine case is light and durable, its structure is precise and causes higher efficiency.
7. Having a prevalent performance, it is equipped with special vibration absorber, speed-adjustable blades or pressure adjustable inkcup.
8. The precise hard axle reduces the friction caused by the movement of machine when printing and has good rust resistance.

TIC-161S

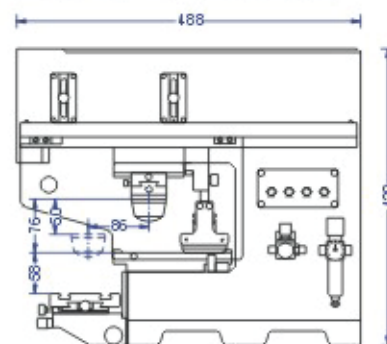

TIC-163S

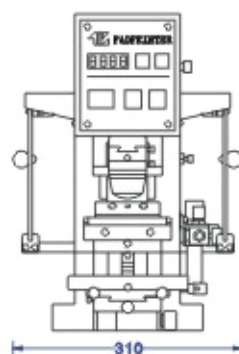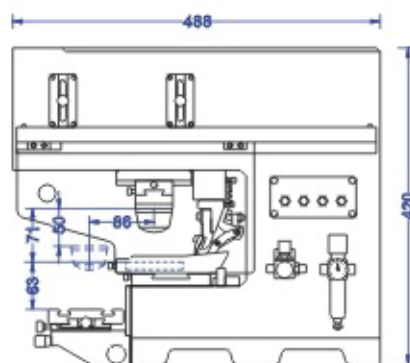

SPECIFICATIONS

MODEL	型号	TIC161SC	TIC163S
Color	印刷颜色	Single Color 单色	
Configuration	配置	Closed ink system 密闭式油墨	Open ink system 开放式油墨
Steel plate size	钢板尺寸	80x150mm 120x150mm	75x100mm
Ink cup size	可装油墨直径	∅ 55mm*(∅ 70mm)	
Max. speed	最大印刷速度	2100 cycle/hr 小时	
Printing force	胶头压力	254N(26kg) at 6 bar	
Air pressure	气源压力	0.4 MPa (4bar)	
Machine dimension	机身尺寸	488x310x420mm	
Packing dimension	包装尺寸	640x410x530mm	
Weight	机身重量	20kg	
Power	电源	110V or 220V 60/50Hz 30W	

For standard configuration